





3° PUNTO IDRAULICO SNODO/SNODO
HYDRAULIC TOP LINKS WITH BALL JOINT ENDS

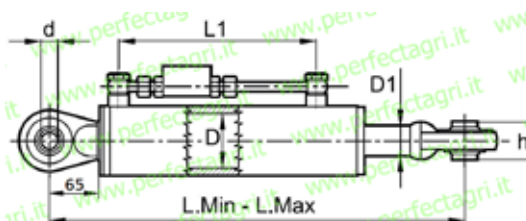

Art.	Potenza trattore	Cat.	rotule Ø		Ø D (ales.)	Ø D1 (stelo)	Corsa mm	Lunghezza Min./Max.
			Lato	Lato				
1150	FINO A 60 HP	1	19	19	50	30	160	421 / 581
1152		1	19	19	50	30	210	471 / 681
1154		1	19	19	50	30	280	541 / 821
1156		1	19	19	50	30	400	650 / 1050
1158		2	25,4	25,4	50	30	160	431 / 591
1160		2	25,4	25,4	50	30	210	481 / 691
1162		2	25,4	25,4	50	30	280	551 / 831
1164		2	25,4	25,4	50	30	400	670 / 1070
1176	DA 60 HP A 80 HP	2	25,4	25,4	63	35	160	450 / 610
1178		2	25,4	25,4	63	35	210	501 / 711
1180		2	25,4	25,4	63	35	280	571 / 851
1182		2	25,4	25,4	63	35	400	690 / 1090
1166	DA 80 HP A 120 HP	2	25,4	25,4	80	40	160	480 / 640
1168		2	25,4	25,4	80	40	210	508 / 718
1170		2	25,4	25,4	80	40	280	578 / 858
1172		2	25,4	25,4	80	40	400	720 / 1120

3° PUNTO IDRAULICO SNODO/SNODO CON PROLUNGA
HYDRAULIC TOP LINKS WITH BALL JOINT ENDS

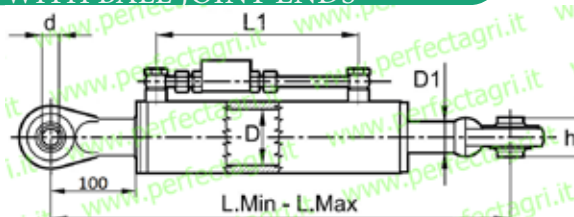

Art.	Ø Foro		Ø D (ales.)	Ø D1 (stelo)	Corsa mm.	Att. d1	Lunghezza Min./Max
	R1	R2					
1176	19	19	50	30	160	3/8"	466 / 626
1178	19	19	50	30	210	3/8"	516 / 726
1180	19	19	50	30	280	3/8"	586 / 866
1182	25,8	25,8	50	30	160	3/8"	466 / 626
1184	25,8	25,8	50	30	210	3/8"	516 / 726
1186	25,8	25,8	50	30	280	3/8"	586 / 866
1188	25,8	25,8	65	35	210	3/8"	536 / 746
1190	25,8	25,8	65	35	280	3/8"	606 / 886
1168	25,8	25,8	80	40	210	3/8"	543 / 753
1170	25,8	25,8	80	40	280	3/8"	613 / 893