




TERZI PUNTI IDRAULICI ATTACCO SNODATO/SNODO  
HYDRAULIC TOP LINKS WITH YOKE

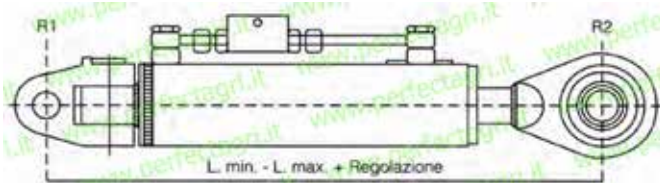

Art.	Ø Foro		Cilindro D	Stelo d	Corsa Mm.	Att. d1	Largh. H	Lunghezza Min./Max
	R1	R2						
1302	25,8	25,8	50	30	210	3/8	51	526 / 736
1303	25,8	25,8	50	30	280	3/8	51	596 / 876
1306	25,8	25,8	65	35	210	3/8	51	546 / 756
1307	25,8	25,8	65	35	280	3/8	51	616 / 896
1310	25,8	25,8	80	40	210	3/8	51	553 / 763
1311	25,8	25,8	80	40	280	3/8	51	623 / 903
1313	25	25	90	45	210	3/8	51	569 / 779
1314	25	25	90	45	280	3/8	51	639 / 919
1325	32	32	90	45	210	3/8	51	569 / 779
1326	32	32	90	45	280	3/8	84	639 / 919