




TIRANTI PER 3° PUNTI  
EYE BOLTS FOR TOP LINKS

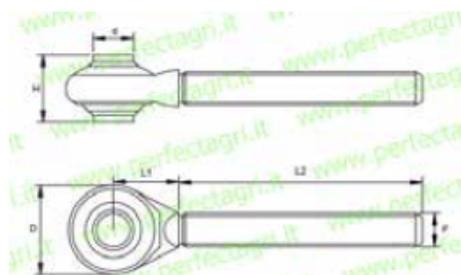

Art.	Cat.	d	H	Fil.	L1	L2	D	Ø sferico
388	0	16	25	20x2,5 dx	40	85	48	32
389	0	16	25	20x2,5 sx	40	85	48	32
186	1	19	44	22x2,5 dx	45	125	52	38
187	1	19	44	22x2,5 sx	45	125	52	38
188	1	19	44	24x2,5 dx	50	115	58	38
189	1	19	44	24x2,5 sx	50	115	58	38
190	1	19	44	27x3 dx	50	155	62	38
191	1	19	44	27x3 sx	50	155	62	38
192	2	25,4	51	27x3 dx	55	170	74	50
193	2	25,4	51	27x3 sx	55	170	74	50
194	2	25,4	51	30x3 dx	55	165	74	50
195	2	25,4	51	30x3 sx	55	165	74	50
473	1	19	44	30x3 dx	50	175	62	38
474	1	19	44	30x3 sx	50	175	62	38
475	2	25,4	51	36x3 dx	55	165	75	54
476	2	25,4	51	36x3 sx	55	165	75	54
477	3	32,3	51	36x3 dx	55	200	80	54
478	3	32,3	51	36x3 sx	55	200	80	54
602	3°	32	51	36x3 dx	70	200	96	60
603	3°	32	51	36x3 sx	70	200	96	60
604	2°	25,4	51	40x3 dx	60	175	80	50
605	2°	25,4	51	40x3 sx	60	175	80	50
606	3°	32	51	40x3 dx	70	200	96	62
607	3°	32	51	40x3 sx	70	200	96	62