



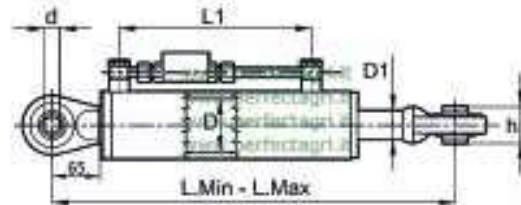

TERZO PUNTO IDRAULICO SNODO/SNODO
HYDRAULIC TOP LINKS WITH BALL JOINT ENDS

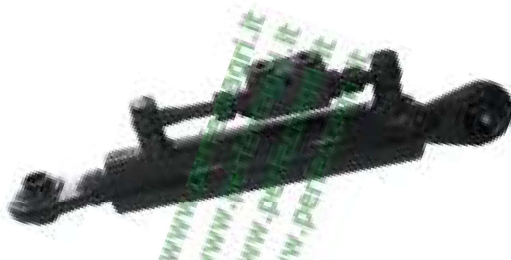

Art.	Potenza trattore	Cat.	rotule Ø		Ø D (ales.)	Ø D1 (stelo)	Corsa mm	Lunghezza Min./Max.
			Lato	Lato				
1150	FINO A 60 HP	1	19	19	50	30	160	421 / 581
1152		1	19	19	50	30	210	471 / 681
1154		1	19	19	50	30	280	541 / 821
1156		1	19	19	50	30	400	650 / 1050
1158		2	25,4	25,4	50	30	160	431 / 591
1160		2	25,4	25,4	50	30	210	481 / 691
1162		2	25,4	25,4	50	30	280	551 / 831
1164		2	25,4	25,4	50	30	400	670 / 1070
1176	DA 60 HP A 80 HP	2	25,4	25,4	63	35	160	450 / 610
1178		2	25,4	25,4	63	35	210	501 / 711
1180		2	25,4	25,4	63	35	280	571 / 851
1182		2	25,4	25,4	63	35	400	690 / 1090
1166	DA 80 HP A 120 HP	2	25,4	25,4	80	40	160	480 / 640
1168		2	25,4	25,4	80	40	210	508 / 718
1170		2	25,4	25,4	80	40	280	635 / 858
1172		2	25,4	25,4	80	40	400	720 / 1120

TUBI RACCORDATI PER CILINDRI
HYDRAULIC HOSE



Art.	A(mm)	B	C
1195	900	1/2"	3/8"
1196	900	1/2"	1/2"

VALVOLE DI BLOCCO CON RACCORDI
DOUBLE VALVES WITH COUPLINGS



Art.	Attacco	L mm	Descrizione
10707	3/8"	500	Con tubi e raccordi
10709	1/2"	500	